

June 2015

Multilayer Low Pass Filter

For 1710-1990MHz

DEA161990LT-1182

- 1.6x0.8mm [EIA 0603]*
- * Dimensions Code JIS[EIA]




Multilayer Low Pass Filter

For 1710-1990MHz


Conformity to RoHS Directive

DEA161990LT-1182

SHAPES AND DIMENSIONS

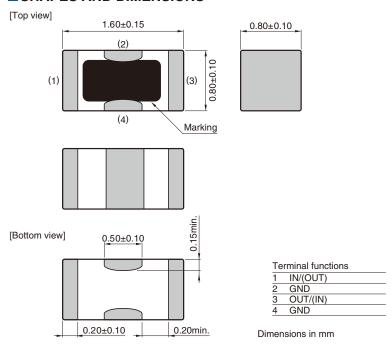

■ RECOMMENDED LAND PATTERN



Line width be designed to match 50Ω characteristic impedance depending on PCB material and thickness.

OROHS Directive Compliant Product: See the following for more details related to RoHS Directive compliant products. http://product.tdk.com/en/environment/rohs/

[•] All specifications are subject to change without notice.

[•] Before using these products, be sure to request the delivery specifications.



DEA161990LT-1182

ELECTRICAL CHARACTERISTICS

Item	Frequency Range (MHz)	Min.	Тур.	Max.
Insertion Loss (dB)	1710 to 1990	_	0.32	0.7
Attenuation (dB)	3700	30	40	_
	5550	25	32	_
Characteristic Impedance (Ω) 50 (Nominal)				

[·] Ta: +25±5°C

■TEMPERATURE RANGE

Operating temperature	Storage temperature		
(°C)	(°C)		
-40 to +85	-40 to +85		


All specifications are subject to change without notice.Before using these products, be sure to request the delivery specifications.




DEA161990LT-1182

■ FREQUENCY CHARACTERISTICS


□INSERTION LOSS



ATTENUATION



RETURN LOSS




[•] All specifications are subject to change without notice.

[•] Before using these products, be sure to request the delivery specifications.



DEA161990LT-1182

■ RECOMMENDED REFLOW PROFILE

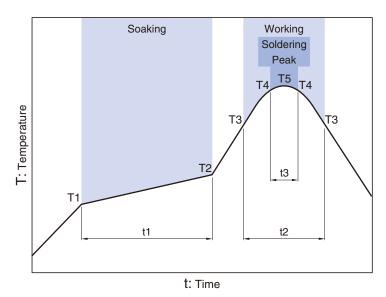

Soaking			Working		Soldering Peak		
Temp.		Time	Temp.	Time	Temp.	Time	Temp.
T1	T2	t1	Т3	t2	T4	t3	T5
150°C	180°C	60 to 120s	230°C	more than 30s	247 to 253°C	within 10s	260°C max.

All specifications are subject to change without notice.Before using these products, be sure to request the delivery specifications.



REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

⚠ REMINDERS

The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.

Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this catalog.

- (1) Aerospace/Aviation equipment
- (2) Transportation equipment (cars, electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When using this product in general-purpose applications, you are kindly requested to take into consideration securing protection circuit/ equipment or providing backup circuits, etc., to ensure higher safety.

[•] All specifications are subject to change without notice.

[•] Before using these products, be sure to request the delivery specifications.